



Pa (Resistivity) contours: 800, 1000, 1200
M (Chargeability) contours: 5, 10, 15, 20
MF (Metal Factor) contours: 2.5, 5, 10, 15,
20 and 30


90-3 Drill hole location

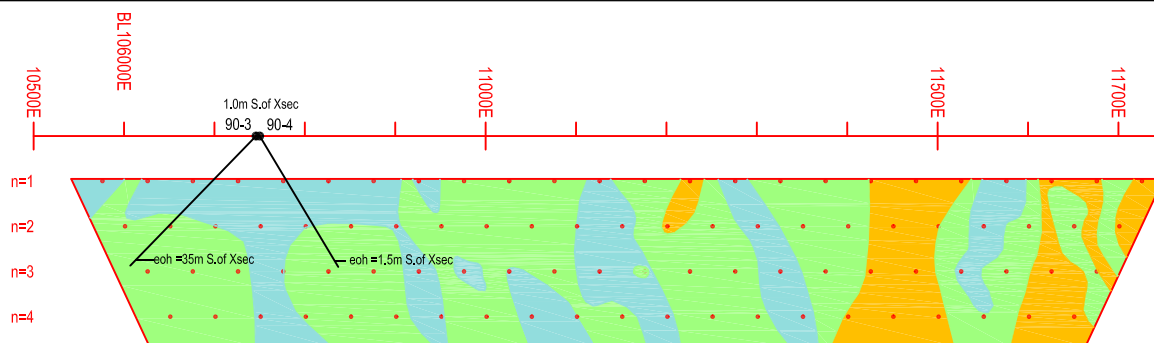


Pa - Apparent Resistivity (ohm-metre)

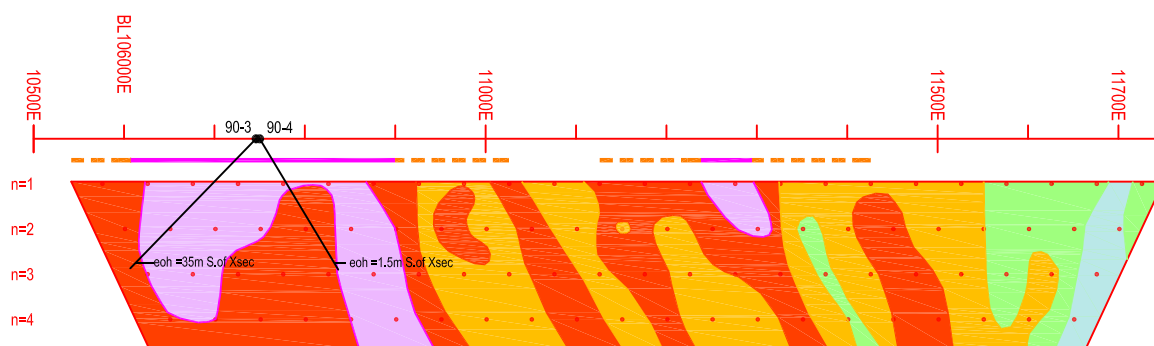

M - Chargeability (msec)

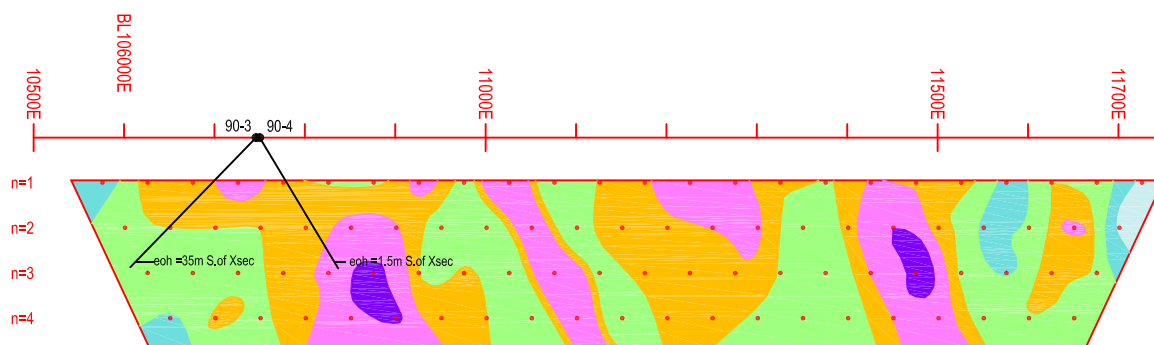

MF - Metal Factor (ohm-metre-msec)

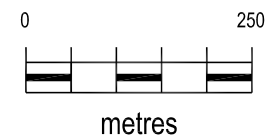

Bearclaw Capital Corp.

Aplite Property
L9100N Pseudosection